


# laservision

## laser safety window P1N01



Articlenumber: 000P1N011001  
GTIN: 4050369026988  
Unit: 1 Stück  
Weight incl. packaging 0,07 kg

### Filtercurve

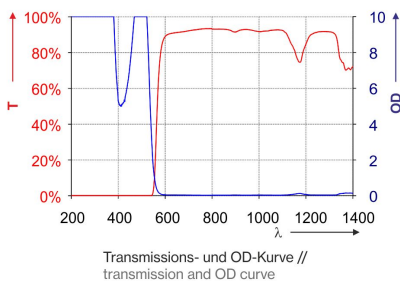

### Highlights

The laservision plastic laser safety window P1N01 is a window for green laser systems up to 535nm and offers an OD 10+ from 180 - 370nm and an OD6+ at 532nm. The orange colored filter material features 38% VLT and is user specific available up to a size of 1219x915mm. The thickness is 3mm. The window is CE certified according to EN 60825-4 and has additionally defined DIN 207 LB protection levels, which are confirmed by [manufacturer's declaration](#) based on external test reports.

<b>COATING:</b>	no coating
<b>COLOUR:</b>	orange
<b>FILTER MATERIAL:</b>	Plastic
<b>FILTER TECHNOLOGY:</b>	Absorption filter
<b>FILTER THICKNESS:</b>	ca. 3mm
<b>PROTECTION CLASS / NORM:</b>	EN 60825, EN 207 full protection according to manufacturer's declaration
<b>PROTECTION RANGE:</b>	visible, ultraviolet
<b>VLT (APPROX.):</b>	38%
<b>VISUAL BRIGHTNESS:</b>	Sufficient
<b>COLOUR RECOGNITION:</b>	Slightly limited

## laser safety window P1N01

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB6 + IR LB3 + M LB6Y
>315 - 370	(OD10+)	D LB5 + IR LB6 + M LB6Y
>370 - 383	(OD8+)	D LB5 + IR LB6 + M LB6Y
>383 - 391	(OD6+)	D LB5 + IR LB6 + M LB6Y
>391 - <445	(OD5+)	DIRM LB5
445 - <455	(OD6+)	D LB5 + IR LB6 + M LB6Y
455 - <463	(OD7+)	D LB5 + IR LB6 + M LB6Y
463 - 524	(OD8+)	D LB5 + IR LB6 + M LB6Y
>524 - 532	(OD6+)	D LB5 + IR LB6 + M LB6Y
>532 - 535	(OD5+)	DIRM LB5
>535 - 538	(OD4+)	DIRM LB4
>538 - 541	(OD3+)	DIRM LB3
>541 - 545	(OD2+)	DIRM LB2
>545 - 550	(OD1+)	DIRM LB1

## DIN EN 60825-4

200-535nm | 37,7 kW/m<sup>2</sup> | T2 | t<sub>max</sub> = 105s

## laser safety window P1N01

### OD

WAVELENGTH (NM)	OD
180 - 315	(OD10+)
>315 - 370	(OD10+)
>370 - 383	(OD8+)
>383 - 391	(OD6+)
>391 - <445	(OD5+)
445 - <455	(OD6+)
455 - <463	(OD7+)
463 - 524	(OD8+)
>524 - 532	(OD6+)
>532 - 535	(OD5+)
>535 - 538	(OD4+)
>538 - 541	(OD3+)
>541 - 545	(OD2+)
>545 - 550	(OD1+)
5400 - <10600	(OD5+)
10600 - 11000	(OD6+)