


laservision

laser safety window P1P10 (6mm)



Articlenumber: 000P1P102607
GTIN: 4050369030800
Weight incl. packaging 1,94 kg

Filtercurve

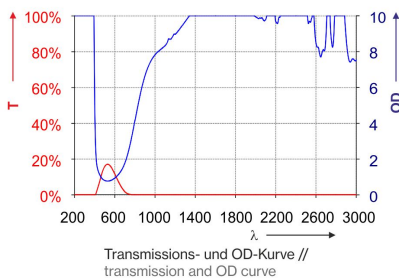

Highlights

The laservision plastic laser safety window P1P10 (6mm, OD 8+) features very high protection ratings within the wavelength area 1,030-1,400nm (D LB6 – IRM LB8) and an additional alignment protection at 635-690nm (RB1). The laser safety window offers a very good color view and a 16% VLT. It is an alternative to conventional green laser safety glass windows. This blue laser safety window is customized available up to a size of 3,000 x 2,000mm. The thickness is 6mm. This window is CE marked with 5 and 10 sec. of test time.

COATING: Anti-scratch on both sides

COLOUR: blue

FILTER MATERIAL: Plastic

FILTER TECHNOLOGY: Absorption filter

FILTER THICKNESS: ca. 6mm

PROTECTION CLASS / NORM: EN 207 full protection, EN 60825, EN 208 Alignment protection

PROTECTION RANGE: near infrared, Infrared, visible, ultraviolet

VLT (APPROX.): 16%

VISUAL BRIGHTNESS: Sufficient

COLOUR RECOGNITION: Good

laser safety window P1P10 (6mm)

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB4 + M LB6
>315 - 385	(OD8+)	D LB6 + IRM LB8
>385 - 400	(OD4+)	DIRM LB4
635 - <720	(OD1+)	DIRM LB1
720 - <770	(OD2+)	DIRM LB2
770 - <800	(OD3+)	DIRM LB3
800 - <840	(OD4+)	DIRM LB4
840 - <880	(OD5+)	DIRM LB5
880 - <960	(OD6+)	DIRM LB6
960 - <1030	(OD7+)	DIRM LB7
1030 - 1400	(OD8+)	D LB7 + IRM LB8
>1400 - 3600	(OD4+)	DI LB4 + R LB3Y + M LB1
>3600 - 4800	(OD3+)	DI LB3 + R LB3Y + M LB1
>4800 - 11500	(OD4+)	DI LB4 + R LB3Y

DIN EN 60825-4

840-3000nm | 102 kW/m² | T2 | t_{max} = 105s

4700-25000nm | 103 kW/m² | T2 | t_{max} = 105s