


# laservision

## laser safety window T1K06



Articlenumber: 000T1K061001  
GTIN: 4050369012974  
Unit: 1 Stück  
Weight incl. packaging 0,45 kg

### Filtercurve

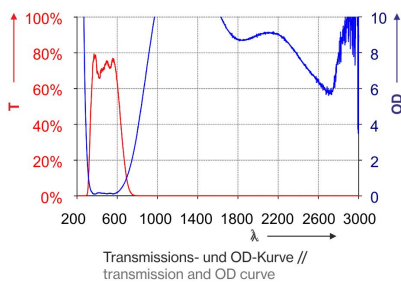

### Highlights

The laservision mineral glass laser safety window 000.T1K06.1001 with lamination provides a very high M LB9 protective effect within the NIR spectral area (1,050-1,400nm). The light grey filter material features a 60% VLT and is customized available up to a size of 297x210mm. The thickness is approximately 6,6 - 7,4 mm. This window is certified acc. EN207 and CE marked with 5 and 10 sec. of test time.

<b>COATING:</b>	no coating
<b>COLOUR:</b>	light grey
<b>FILTER MATERIAL:</b>	Mineral glass
<b>FILTER TECHNOLOGY:</b>	Absorption filter
<b>FILTER THICKNESS:</b>	ca. 6,6 - 7,4 mm
<b>PROPERTIES:</b>	No neutral glass lamination
<b>PROTECTION CLASS / NORM:</b>	EN 207 full protection, EN 60825
<b>PROTECTION RANGE:</b>	near infrared, Infrared
<b>VLT (APPROX.):</b>	60%
<b>VISUAL BRIGHTNESS:</b>	Very good
<b>COLOUR RECOGNITION:</b>	Excellent

## laser safety window T1K06

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
730 - <780	(OD1+)	DIRM LB1
780 - <808	(OD2+)	DIRM LB2
808 - 840	(OD3+)	DIRM LB3
>840 - 870	(OD4+)	DIRM LB4 (OD4+)
>870 - 885	(OD5+)	DIRM LB5
>885 - 900	(OD6+)	DIRM LB6
>900 - 950	(OD7+)	DIRM LB7
>950 - 1000	(OD8+)	D LB7 + IRM LB8
>1000 - 1400	(OD9+)	D LB7 + IR LB8 + M LB9
>1400 - 3500	(OD5+)	DI LB5 + RM LB4
>3500 - 25000	(OD10+)	DI LB5 + R LB3Y + M LB5

## DIN EN 60825-4

950-1399nm | 143 kW/m<sup>2</sup> | T2 | t<sub>max</sub> = 105s

3000-25000nm | 221 kW/m<sup>2</sup> | T2 | t<sub>max</sub> = 105s