


## E25.M7P06.1002 (E25 connecting module)

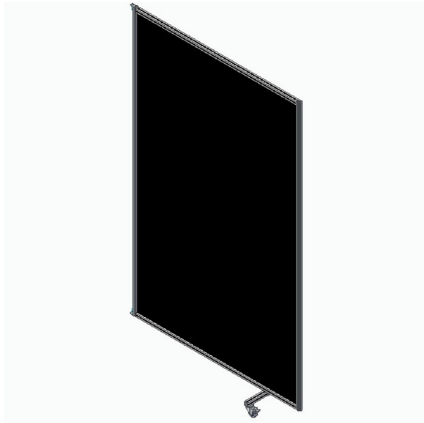

Articlenumber: E25M7P061002  
GTIN: 4050369052178  
Unit: 1 Stück  
Weight incl. packaging 14,60 kg  
Weight excl. packaging: 14,60 kg

### Highlights

The E25 modular folding wall connecting module E25.M7P06.1002 from laservision is used for the individual expansion of the basic module E25.M7P06.1001.

Each individual module has the dimensions: 2100x1257x308mm (HxWxD)

The intermediate module is filled with the proven plate material M7P06 as standard. This is based on a special aluminum sandwich structure with coated aluminum cover plates (black).

With the basic module it can be set up together with the respective number of intermediate modules, for example as a room divider in laboratories or laser-safe partitions around optical tables.

<b>COLOUR:</b>	silver, black
<b>PROPERTIES:</b>	standard plate material M7P06, freely selectable number of modules, proven hinge system, both-sides usable
<b>PROTECTION CLASS / NORM:</b>	EN 60825-4, EN 12254
<b>PROTECTION RANGE:</b>	near infrared, Infrared, visible, ultraviolet

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	–	D AB9 + IR AB4 + M AB6Y
>315 - 1050	–	D AB8 + IR AB9 + M AB10
>1050 - 1400	–	D AB7 + IR AB9 + M AB10
>1400 - 25000	–	D AB5

### DIN EN 60825-4

1070nm | 960 kW/m<sup>2</sup> | T2 | t<sub>max</sub> = 210s

9000-11000nm | 615 kW/m<sup>2</sup> | T2 | t<sub>max</sub> = 105s