


laservision

laser safety spectacle F18P1L10




Articlenumber: F18P1L101001
GTIN: 4050369026889
Unit: 1 Stück
Weight incl. packaging 0,23 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

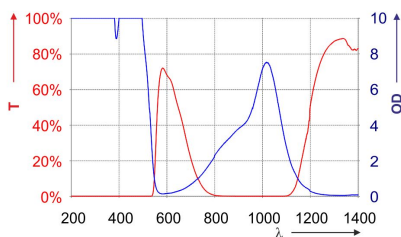

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Full Protection (LB) for Nd:YAG, SHG, THG incl. pump diodes
- DIRM LB4 protection level for 532nm DIRM LB6 for 355nm
- Fluorescence effect for alignment
- As OTG in the [F18/F22](#) frame available

The laser safety goggle F18.P1L10.1001 is characterized with very high protection against current laser pointer within the blue, green and red range. It provides full protection acc. EN 207 and features M-ratings within the complete range from 180 – 1070nm. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For a professional cleaning of laser safety spectacles laservision recommends the cleaning station (A99.CLSTA.1300).

COATING:	no coating
CUSHION:	No cushion
FILTER:	P1L10
FILTER COLOUR:	Orange
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F18
FRAME TYPE:	OTG with temples
PROPERTIES:	Lightweight, M-protection rating
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, visible, ultraviolet
VLT (APPROX.):	40%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Limited

laser safety spectacle F18P1L10

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD8+)	D LB8 + IR LB4 + M LB6
>315 - 500	(OD6+)	DIRM LB6
>500 - 532	(OD4+)	DIRM LB4
800 - <975	(OD2+)	DIRM LB2
975 - 1070	(OD4+)	DIRM LB4