laservision

laser safety spectacle F18P1P18

Highlights

- protection levels are certified acc. EN 207
- full protection within the UV, VIS, NIR and IR range
- suitable for diode laser at 808 to 1064nm, for UV-laser, blue lasers and Nd:YAG-laser
- disc- and fiberlaser as well as CO_2
- available in the frames F18/ F22/ F27/ F29/ F42 and FS1
- very good daylight transmission (app. 47% VLT)
- good color view

Articlenumber: F18P1P181001
GTIN: 4050369050648
Unit: 1 Stück
Weight incl. packaging 0,23 kg
Weight excl. packaging: 0,04 kg

The laser safety goggles F18.P1P18.1001 are suitable for diode lasers in the range 808 to 1064nm as well as for UV-, blue, NdYAG, disc and fiber lasers and CO_2 lasers. The laser safety eyewear from laservision can also be used in the medical sector, especially for applications with dental, surgical and dermatological lasers. It can be worn as over-glasses on corrective lenses. The continuous, one-piece protection filter ensures the best all-round visibility without being restricted by a frame. The F18 frame stands out for its light weight and perfect fit for almost any head shape. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For a professional cleaning of laser safety spectacles laservision recommends the cleaning station (A99.CLSTA.1300).

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

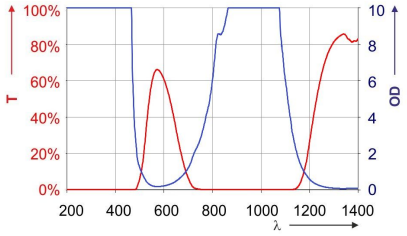

Transmissions- und OD-Kurve //
transmission and OD curve

COATING:	no coating
CUSHION:	No cushion
FILTER:	P1P18
FILTER COLOUR:	Gold
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F18
FRAME TYPE:	OTG with temples
PROPERTIES:	Lightweight
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, visible, ultraviolett
VLT (APPROX.):	47%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Good

LASERVISION GmbH | Würzburger Str. 152, D-90766 Fürth | **T** +49 911 9736 8100 | **E** info@lvg.com | **I** uvex-laservision.de

laservision

laser safety spectacle F18P1P18

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
185 - 315	(OD10+)	D LB10 + IR LB4 + M LB6
>315 - 466	(OD8+)	D LB6 + IR LB8 + M LB8Y
>466 - 468	(OD7+)	D LB6 + IRM LB7
>468 - 470	(OD6+)	DIRM LB6
>470 - 472	(OD5+)	DIRM LB5
>472 - 475	(OD4+)	DIRM LB4
780 - <795	(OD4+)	DIRM LB4
795 - <800	(OD5+)	DIRM LB5
800 - <813	(OD6+)	DIRM LB6
813 - <847	(OD7+)	D LB6 + IRM LB7
847 - <864	(OD8+)	D LB6 + IRM LB8
864 - <880	(OD9+)	D LB6 + IR LB8 + M LB9
880 - 1070	(OD10+)	D LB6 + I LB9 + R LB8 + M LB10
>1070 - 1075	(OD9+)	D LB6 + IR LB8 + M LB9
>1075 - 1080	(OD8+)	D LB6 + IRM LB8
>1080 - 1087	(OD7+)	D LB6 + IRM LB7
>1087 - 1100	(OD6+)	DIRM LB6
>1100 - 1108	(OD5+)	DIRM LB5
>1108 - 1115	(OD4+)	DIRM LB4
5250 - <10600	(OD5+)	DI LB4 + R LB3Y
>10600 - 14000	(OD5+)	DI LB4 + R LB3Y

LASERVISION GmbH | Würzburger Str. 152, D-90766 Fürth | **T** +49 911 9736 8100 | **E** info@lvg.com | **I** uvex-laservision.de