

laser safety spectacle F20P1F01




Articlenumber: F20P1F011001
GTIN: 4050369011724
Unit: 1 Stück
Weight incl. packaging 0,27 kg
Weight excl. packaging: 0,03 kg

Highlights

- LB Protection levels acc. EN 207
- Suitable for Alexandrite and IR-diode lasers
- Low weight and high wearing comfort
- Very good colour view and high VLT
- Available in the frames [F18](#), [F20](#), [F22](#), [F42](#) and as a laser safety magnifier [F27](#).


The laser safety spectacle F20.P1F01.1001 is especially suitable for Alexandrite laser and pump diodes within the NIR-wavelength range 810nm and 840-855nm. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For a professional cleaning of laser safety spectacles laservision recommends the cleaning station (A99.CLSTA.1300).

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

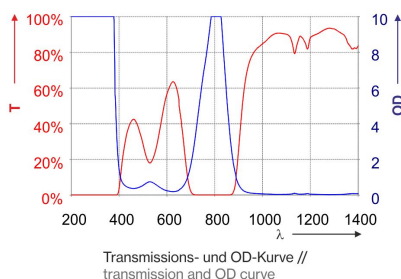

Transmissions- und OD-Kurve //
transmission and OD curve

COATING:	no coating
FILTER:	P1F01
FILTER COLOUR:	Magenta
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F20
FRAME TYPE:	Spectacle
PROPERTIES:	Cold malleable temples, Lightweight
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, ultraviolet
VLT (APPROX.):	35%
VISUAL BRIGHTNESS:	Good
COLOUR RECOGNITION:	Very good

laser safety spectacle F20P1F01

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD5+)	D LB5 + R LB4
>315 - 375	(OD5+)	D LB4 + R LB5
>375 - 390	(OD3+)	DR LB3
730 - <755	(OD4+)	DIR LB4
755 - 840	(OD7+)	DR LB5 + I LB7Y
>840 - 855	(OD4+)	DIR LB4