


laser safety spectacle F20T2K05




Articlenumber: F20T2K051001
GTIN: 4050369013520
Unit: 1 Stück
Weight incl. packaging 0,33 kg
Weight excl. packaging: 0,06 kg

Color view

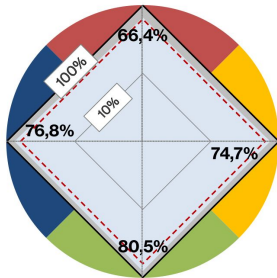

Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

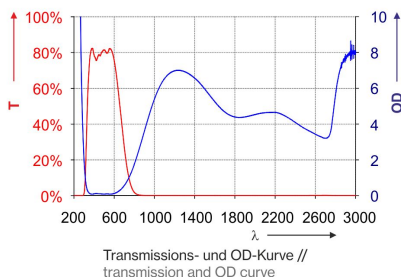

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection levels certified acc. to EN 20
- 7 different frame styles
available: [F20](#), [F46](#), [R01](#), [R02](#), [R10](#), [R14](#) and [R17](#)
- Unlimited colour recognition and very high VLT (75%)
- Different Wearing options

The laser safety spectacle F20.T2K05.1001 provides a broadband laser safety within the NIR- and IR-spectral range (850-11500nm). The spectacle with convex, coated, light grey filters and formable temples offers a very gut field of view. Through to the light weight it also offers a good wearing comfort. It is shipped in a metal box which can also be used as a storage box. laservision recommends the professional cleaning station (A99.CLSTA.1300) for cleaning the laser safety loupe.

COATING:	no coating
CUSHION:	No cushion
FILTER:	T2K05
FILTER COLOUR:	Light grey
FILTER CURVATURE:	Base curve 6
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 3-4mm
FRAME:	F20
FRAME TYPE:	Spectacle
PROPERTIES:	Cold malleable temples, No neutral glass lamination
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared
VLT (APPROX.):	75%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Excellent

laser safety spectacle F20T2K05

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
850 - 900	(OD2+)	DIRM LB2
>900 - 950	(OD3+)	DIRM LB3
>950 - 1030	(OD4+)	DIRM LB4
>1030 - 1400	(OD5+)	DIRM LB5
>1400 - 2200	(OD4+)	DIRM LB4
2400 - 2800	(OD3+)	DIRM LB3
>2800 - 25000	(OD4+)	DIM LB4 + R LB3Y