


laser safety spectacle F22P1P18




Articlenumber: F22P1P181001
GTIN: 4050369050655
Unit: 1 Stück
Weight incl. packaging 0,23 kg
Weight excl. packaging: 0,04 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

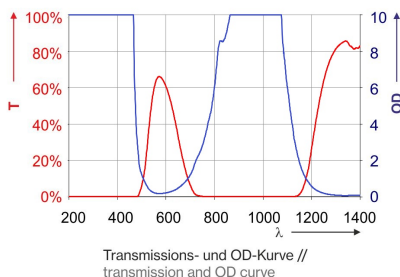

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- protection levels are certified acc. EN 207
- full protection within the UV, VIS, NIR and IR range
- suitable for diode laser at 808 to 1064nm, for UV-laser, blue lasers and Nd:YAG-laser
- disc- and fiberlaser as well as CO₂
- available in the frames [F18/ F22/ F27/ F29/ F42](#) and [FS1](#)
- very good daylight transmission (app. 47% VLT)
- good color view

The laser safety goggle F22.P1P18.1001 with standard temples are suitable for diode lasers in the range 808 to 1064nm as well as for UV-blue-, NdYAG, disc and fiber lasers as well as for CO₂-lasers. The laser safety glasses from laservision can also be used in the medical sector, especially for applications with dental, surgical and dermatological lasers. It can be worn as over-glasses on corrective lenses. The continuous, one-piece protection filter ensures the best all-round visibility without being restricted by a frame. The F22 frame stands out for its light weight and perfect fit for almost any head shape. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For a professional cleaning of laser safety spectacles laservision recommends the cleaning station (A99.CLSTA.1300).

COATING:	no coating
CUSHION:	No cushion
FILTER:	P1P18
FILTER COLOUR:	Gold
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F22
FRAME TYPE:	OTG with temples
PROPERTIES:	Lightweight
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, visible, ultraviolet
VLT (APPROX.):	47%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Good

laser safety spectacle F22P1P18

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
185 - 315	(OD10+)	D LB10 + IR LB4 + M LB6
>315 - 462	(OD10+)	D LB6 + IR LB8 + M LB8Y
>462 - 464	(OD9+)	D LB6 + IR LB8 + M LB8Y
>464 - 466	(OD8+)	D LB6 + IR LB8 + M LB8Y
>466 - 468	(OD7+)	D LB6 + IRM LB7
>468 - 470	(OD6+)	DIRM LB6
>470 - 472	(OD5+)	DIRM LB5
>472 - 475	(OD4+)	DIRM LB4
>475 - 478	(OD3+)	DIRM LB3
>478 - 485	(OD2+)	DIRM LB2
>485 - 500	(OD1+)	DIRM LB1
700 - <733	(OD1+)	DIRM LB1
733 - <763	(OD2+)	DIRM LB2
763 - <780	(OD3+)	DIRM LB3
780 - <795	(OD4+)	DIRM LB4
795 - <800	(OD5+)	DIRM LB5
800 - <813	(OD6+)	DIRM LB6
813 - <847	(OD7+)	D LB6 + IRM LB7
847 - <864	(OD8+)	D LB6 + IRM LB8
864 - <880	(OD9+)	D LB6 + IR LB8 + M LB9
880 - 1070	(OD10+)	D LB6 + I LB9 + R LB8 + M LB10
>1070 - 1075	(OD9+)	D LB6 + IR LB8 + M LB9
>1075 - 1080	(OD8+)	D LB6 + IRM LB8
>1080 - 1087	(OD7+)	D LB6 + IRM LB7
>1087 - 1100	(OD6+)	DIRM LB6
>1100 - 1108	(OD5+)	DIRM LB5
>1108 - 1115	(OD4+)	DIRM LB4
>1115 - 1126	(OD3+)	DIRM LB3
>1126 - 1143	(OD2+)	DIRM LB2
>1143 - 1150	(OD1+)	DIRM LB1
5250 - 14000	(OD5+)	DI LB4 + R LB3Y