



laservision

laser safety magnifier F27P1M02 420mm

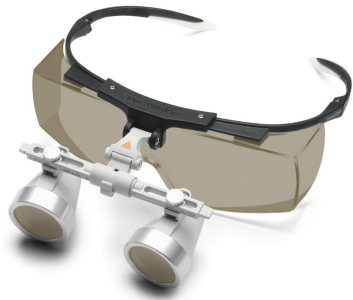


Articlenumber: F27P1M021241
GTIN: 4050369038875
Unit: 1 Stück
Weight incl. packaging 0,59 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

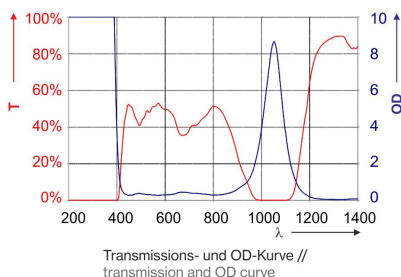

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Full Protection with LB levels acc. to EN 207
- Suitable for the UV range, Nd:YAG, disc-, fiber- and CO₂-Laser
- Substitute for glass filters within special applications
- Narrow band filter for many medical laser systems
- Available in the frames [F18](#), [F22](#), [F42](#) and [F27](#)
- Unrestricted color view
- Excellent VLT

The laservision laser safety magnifier F27.P1M02.1241 with standard temples is suitable for CO₂, Nd:YAG as well as for fiber- and disc laser. The filter P1M02, within the shield and also on the magnifier, features an excellent visual transmission and a very good colour view. The delivery of the laser safety loupes is carried out in a foam-filled plastic case with eyeglass cloth, sterilizable swivel levers and a cord for hanging or for individually determining the glasses on the head. laservision recommends the professional cleaning station (A99.CLSTA.1300) for cleaning the laser safety loupe.

COATING:	no coating
CUSHION:	No cushion
FILTER:	P1M02
FILTER COLOUR:	Light grey
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F27
FRAME TYPE:	OTG with temples
PROPERTIES:	Lightweight, M-protection rating
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, ultraviolet
VLT (APPROX.):	45%
VISUAL BRIGHTNESS:	Excellent
COLOUR RECOGNITION:	Very good

laser safety magnifier F27P1M02 420mm

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD9+)	D LB9 + IR LB4 + M LB6Y
1002 - <1020	(OD4+)	DIRM LB4
1020 - <1030	(OD6+)	DIRM LB6
1030 - 1070	(OD7+)	D LB6 + IR LB7 + M LB7Y
>1070 - 1080	(OD6+)	DIRM LB6
>1080 - 1096	(OD4+)	DIRM LB4
9000 - 11500	(OD6+)	DI LB4