


laservision

laser safety magnifier F27P1M03 340mm




Articlenumber: F27P1M031231
GTIN: 4050369039803
Unit: 1 Stück
Weight incl. packaging 0,59 kg
Weight excl. packaging: 0,10 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

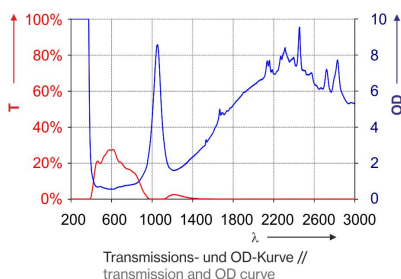

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Full Protection with LB levels acc. to EN 207
- Suitable for the UV range, Nd:YAG, disc-, fiber- and CO₂-Laser
- Anti-scratch / anti-fog coating
- Very good color view
- Very good VLT
- Available in the frame [F18](#), [F22](#), [F29](#), and as a laser safety magnifier ([F27](#))

The laservision laser safety magnifier F27.P1M03.1231 offers full protection for almost the continuous wavelength range 180-14000nm. It is especially suitable for medical lasers, for combination lasers around 1064nm, for CO₂ lasers, Nd: YAG, disk and fiber lasers and in the NIR range. It also has M protection levels for ultra-short laser pulses. The laser safety goggle has a good visual brightness and a daylight transmission (VLT) of approx. 25%. The standard magnification is 2,5 at a working distance of 340mm. The delivery of the laser safety loupes is carried out in a foam-filled plastic case with eyeglass cloth, sterilizable swivel levers and a cord for hanging or for individually determining the glasses on the head. laservision recommends the professional cleaning station (A99.CLSTA.1300) for cleaning the laser safety loupe.

COATING:	Front side anti-scratch / rear side anti-fog
CUSHION:	No cushion
FILTER:	P1M03
FILTER COLOUR:	Grey
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F27
FRAME TYPE:	OTG with temples
PROPERTIES:	Lightweight, M-protection rating
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, ultraviolet
VLT (APPROX.):	25%
VISUAL BRIGHTNESS:	Good

laser safety magnifier F27P1M03 340mm

COLOUR RECOGNITION: Very good

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB4 + M LB6Y
>315 - 375	(OD8+)	D LB6 + IR LB8 + M LB8Y
>375 - 385	(OD3+)	DIRM LB3
1020 - <1030	(OD6+)	DIRM LB6
1030 - <1040	(OD7+)	D LB6 + IRM LB7
1040 - 1064	(OD8+)	D LB6 + IR LB8 + M LB8Y
>1064 - 1073	(OD7+)	D LB6 + IRM LB7
>1073 - 1083	(OD6+)	DIRM LB6
>1083 - 1090	(OD5+)	DIRM LB5
1090 - 1100	(OD4+)	DIRM LB4
1400 - <1600	(OD2+)	DIRM LB2
1600 - <1750	(OD3+)	DIM LB3 + R LB3Y
1750 - 3000	(OD4+)	DIM LB4 + R LB3Y
>3000 - <5400	(OD2+)	DIRM LB2
5400 - 14000	(OD6+)	DI LB4 + R LB3Y + M LB5Y