



laservision

laser safety magnifier F27P1P18 340mm




Articlenumber: F27P1P181231
GTIN: 4050369050662
Unit: 1 Stück
Weight incl. packaging 0,59 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

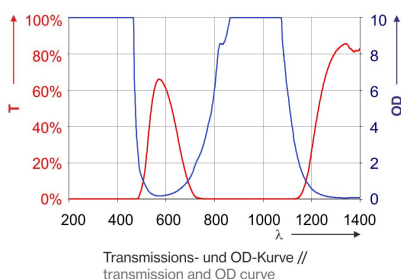

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- protection levels are certified acc. EN 207
- full protection within the UV, VIS, NIR and IR range
- suitable for diode laser at 808 to 1064nm, for UV-laser, blue lasers and Nd:YAG-laser
- disc- and fiberlaser as well as CO₂
- available in the frames [F18/ F22/ F27/ F29/ F42](#) and [FS1](#)
- very good daylight transmission (app. 47% VLT)
- good color view

The laservision laser safety magnifier F27.P1P18.1231 with standard temples is suitable for medical lasers, combi lasers at 1064nm, for CO₂, Nd:YAG and fiber- and disc laser. The laser safety magnifier F27 combines the proven OTG frame F22, supported by the specially developed adapter, with a binocular magnifier HR2.5x/340mm from one of the leading German manufacturers. The delivery of the laser safety loupes is carried out in a foam-filled plastic case with eyeglass cloth, sterilizable swivel levers and a cord for hanging or for individually determining the glasses on the head. laservision recommends the professional cleaning station for cleaning the laser safety loupe.

COATING:	no coating
CUSHION:	No cushion
FILTER:	P1P18
FILTER COLOUR:	Gold
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F27
FRAME TYPE:	OTG with temples
PROPERTIES:	Lightweight
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, visible, ultraviolet
VLT (APPROX.):	47%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Good

laser safety magnifier F27P1P18 340mm

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
185 - 315	(OD10+)	D LB10 + IR LB4 + M LB6
>315 - 466	(OD8+)	D LB6 + IR LB8 + M LB8Y
>466 - 468	(OD7+)	D LB6 + IRM LB7
>468 - 470	(OD6+)	DIRM LB6
>470 - 472	(OD5+)	DIRM LB5
>472 - 475	(OD4+)	DIRM LB4
780 - <795	(OD4+)	DIRM LB4
795 - <800	(OD5+)	DIRM LB5
800 - <813	(OD6+)	DIRM LB6
813 - <847	(OD7+)	D LB6 + IRM LB7
847 - <864	(OD8+)	D LB6 + IRM LB8
864 - <880	(OD9+)	D LB6 + IR LB8 + M LB9
880 - 1070	(OD10+)	D LB6 + IR LB8 + M LB10
>1070 - 1075	(OD9+)	D LB6 + IR LB8 + M LB9
>1075 - 1080	(OD8+)	D LB6 + IRM LB8
>1080 - 1087	(OD7+)	D LB6 + IRM LB7
>1087 - 1100	(OD6+)	DIRM LB6
>1100 - 1108	(OD5+)	DIRM LB5
>1108 - 1115	(OD4+)	DIRM LB4
5250 - 14000	(OD5+)	DI LB4 + R LB3Y
10600 - 10600	(OD8+)	DI LB4 + R LB3Y