


laser safety spectacle F29P1H06




Artikelnr.: F29P1H061001
GTIN: 4050369050495
Unit: 1 Stück
Weight incl. packaging 0,23 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

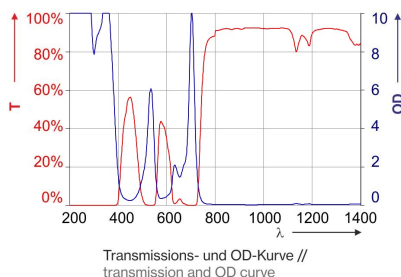

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- DIR LB6 at 532nm acc. to EN 207
- Suitable for SHG Nd:YAG lasers
- Available with frame [F29](#), [F18](#), [F22](#), [F42](#)
- Very good color view and 15% VLT

The laser safety eyewear F29.P1H06.1001 has a daylight transmission of approx. 15% and a good color vision, is suitable for SHG, Nd: YAG lasers in the 532nm range and has full protection function. The sporty shield has adjustable straps and thus ensures a very high wearing comfort. The continuous, one-piece protection filter in base curve 9 (BC9) ensures an undistorted view and a large field of view. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For a professional cleaning laservision recommends the professional cleaning station (A99CLSTA1300).

COATING:	no coating
FILTER:	P1H06
FILTER COLOUR:	Violet
FILTER CURVATURE:	Base curve 9
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F29
FRAME TYPE:	Spectacle
PROPERTIES:	Lightweight
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	visible
VLT (APPROX.):	15%
VISUAL BRIGHTNESS:	Good
COLOUR RECOGNITION:	Good

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
532 - 532	(OD6+)	DIR LB6