


laservision

laser safety spectacle F42P1H03




Articlenumber: F42P1H031001
GTIN: 4050369050013
Unit: 1 Stück
Weight incl. packaging 0,24 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

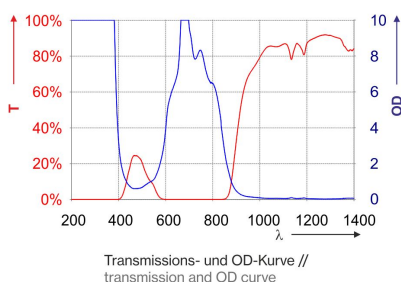

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- LB Protection levels acc. to EN 207
- Suitable for Laserdiodes from 600-820nm
- Available in the frames [F18](#), [F22](#), [F42](#) and and in the sports version [F29](#)
- Restricted colour view and 10% VLT

The laser safety spectacle F42.P1H03.1001 with disinfectable folding brackets, a quick release system and quick-forming temple tips has a daylight transmission of approx. 10%. The laser safety spectacle are suitable for laser diodes of 600-820nm. The disinfectable frame with cold-forged hinges and the new Quick Release can also be worn as overglasses via prescription lenses. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For cleaning the laser safety goggles, laservision recommends the professional cleaning station A99CLSTA1300.

COATING:	no coating
FILTER:	P1H03
FILTER COLOUR:	Blue green
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 3mm
FRAME:	F42
FRAME TYPE:	OTG with temples
PROPERTIES:	Quick Release, Lightweight, M-protection rating, kaltverformbare Bügelenden, desinfizierbar
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, visible
VLT (APPROX.):	10%
VISUAL BRIGHTNESS:	Sufficient
COLOUR RECOGNITION:	Strongly limited

laser safety spectacle F42P1H03

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
540 - <578	(OD1+)	DIRM LB1
578 - <595	(OD2+)	DIRM LB2
595 - <610	(OD3+)	DIRM LB3
610 - <630	(OD5+)	DIRM LB5
630 - <660	(OD6+)	DIRM LB6
660 - 775	(OD7+)	D LB6 + IR LB7 + M LB7Y
>775 - 790	(OD6+)	DIRM LB6
>790 - 800	(OD5+)	DIRM LB5
>800 - 820	(OD4+)	DIRM LB4
>820 - 835	(OD3+)	DIRM LB3
>835 - 850	(OD2+)	DIRM LB2
>850 - 870	(OD1+)	DIRM LB1