


laservision

laser safety spectacle F42P1P10




Articlenumber: F42P1P101001
GTIN: 4050369050136
Unit: 1 Stück
Weight incl. packaging 0,24 kg
Weight excl. packaging: 0,05 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

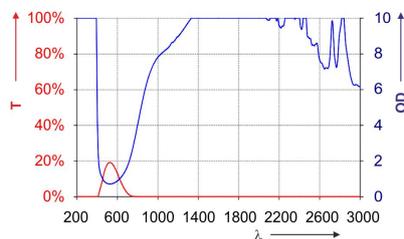

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Full (LB) and Alignment Protection (RB) acc. to EN 207/208
- M-protection rating
- Available in the frames [F18](#), [F22](#), [F29](#), [F42](#), [F47](#), [F27](#), [FS1](#)
- Anti-Scratch standard coating
- 1030-1400nm D LB6 + IRM LB8
- also available as laser safety window with 3 or 6mm thickness

The laser safety spectacle F42.P1P10.1001 with disinfected hinged arms, a quick-release system and cold-forming temple tips has a daylight transmission of approx. 16% and a good color vision. is, except less interruptions, certified for the wavelength range 180-11500nm acc. EN 207. It is especially characterized for its high leveled protection rating within the IR-range. Additionally it offers M-protection rating for USP lasers and an alignment protection between 640-700nm acc. to EN 208. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For cleaning the laser safety goggles, laservision recommends the professional cleaning station (A99.CLSTA.1300).

COATING:	Anti-scratch on both sides
FILTER:	P1P10
FILTER COLOUR:	Blue
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F42
FRAME TYPE:	OTG with temples
PROPERTIES:	Quick Release, Lightweight, M-protection rating, kaltverformbare Bügelenden, desinfizierbar
PROTECTION CLASS / NORM:	EN 207 full protection, EN 208 Alignment protection
PROTECTION RANGE:	near infrared, Infrared, visible, ultraviolet
VLT (APPROX.):	16%
VISUAL BRIGHTNESS:	Sufficient
COLOUR RECOGNITION:	Good

laser safety spectacle F42P1P10

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB4 + M LB6
>315 - 385	(OD8+)	D LB6 + IRM LB8
>385 - 400	(OD4+)	DIRM LB4
635 - <720	(OD1+)	DIRM LB1
720 - <770	(OD2+)	DIRM LB2
770 - <800	(OD3+)	DIRM LB3
800 - <840	(OD4+)	DIRM LB4
840 - <880	(OD5+)	DIRM LB5
880 - <960	(OD6+)	DIRM LB6
960 - <1030	(OD7+)	D LB6 + IRM LB7
1030 - 1400	(OD8+)	D LB6 + IRM LB8
>1400 - 3600	(OD4+)	DIM LB4 + R LB3Y
>3600 - 5250	(OD3+)	DIM LB3 + R LB3Y
>5250 - 14000	(OD5+)	DI LB4 + R LB3Y + M LB5Y