


laservision

laser safety spectacle R01P1D01




Articlenumber: R01P1D011001
GTIN: 4050369084742
Unit: 1 Stück
Weight incl. packaging 0,44 kg
Weight excl. packaging: 0,40 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

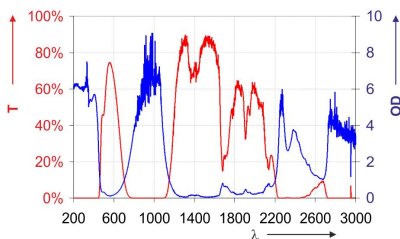

Highlights

- LB Protection ratings acc. EN 207
- D LB5 Protection Level for CO₂-Laser acc. EN 207
- Low weight
- Unrestricted color view and 90% VLT
- Filter for CO₂-surgical lasers
- Available in the frames [R01](#), [R02](#) and [R14](#)

The laservision R01.P1D01.1001 laser safety eyewear offers high levels of protection in the UV range and D LB5 protection for CO₂ lasers. These full-coverage goggles have a daylight transmission of approx. 90% and can be combined with an RX insert. The small, reinforced temple glasses with colorless filters are lightweight and offer a good field of vision. The Duoflex temples have soft ends and can be adjusted in length and angle. They come in a metal box, which can also be used for storage, together with a cord for hanging the glasses around the neck.

COATING:	no coating
CUSHION:	No cushion
FILTER:	P1D01
FILTER COLOUR:	Colourless
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 5mm
FRAME:	R01
FRAME TYPE:	Spectacle with Rx insert option
PROPERTIES:	Adjustable temples, M-protection rating
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	Infrared, visible, ultraviolet
VLT (APPROX.):	90%
VISUAL BRIGHTNESS:	Excellent
COLOUR RECOGNITION:	Excellent

laser safety spectacle R01P1D01

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB4 + M LB6Y
>315 - 367	(OD8+)	D LB6 + IR LB8 + M LB7Y
>367 - 369	(OD7+)	D LB6 + IR LB7 + M LB7Y
>369 - 371	(OD6+)	DIRM LB6
>371 - 373	(OD5+)	DIRM LB5
>373 - 375	(OD4+)	DIRM LB4
>375 - 377	(OD3+)	DIRM LB3
>377 - 380	(OD2+)	DIRM LB2
>380 - 384	(OD1+)	DIRM LB1
3950 - <4700	(OD4+)	D LB4 + IM LB4Y + R LB3Y
4700 - <4765	(OD5+)	D LB5 + IM LB5Y + R LB3Y
4765 - 25000	(OD6+)	D LB5 + I LB5Y + R LB3Y + M LB6Y