


# laservision

## laser safety spectacle R01T1E02




Articlenumber: R01T1E021001  
GTIN: 4050369002296  
Unit: 1 Stück  
Weight incl. packaging 0,44 kg

### Color view



Transmission der Signalfarben nach DIN EN 172 //  
transmission of signal colours acc. to EN 172

### Filtercurve

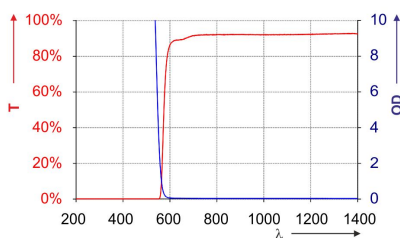

Transmissions- und OD-Kurve //  
transmission and OD curve

### Highlights

- Protection Levels acc. to EN 207
- Application: Nd:YAG Laser at 266/355 or 532nm
- 3 different frame styles available: [R01](#), [R14](#) and [R17](#)
- restricted colour recognition and 40% VLT
- 3 different wearing options
- as cabin window available up to 210x297mm

The laservision laser safety eyewear R01.T1E02.1001 provides high protection ratings within the UV and VIS spectral range (180-532nm). The full protection spectacle can be combined with an Rx-insert. The small, reinforced goggle with adjustable temples and orange filters is characterized with a light weight and a good field of view. The shipment includes a spectacle cord and a metal box, which can also be used as its storage box.

<b>COATING:</b>	no coating
<b>CUSHION:</b>	No cushion
<b>FILTER:</b>	T1E02
<b>FILTER COLOUR:</b>	Orange
<b>FILTER CURVATURE:</b>	Flat filter
<b>FILTER MATERIAL:</b>	Mineral glass
<b>FILTER TECHNOLOGY:</b>	Absorption filter
<b>FILTER THICKNESS:</b>	ca. 5mm
<b>FRAME:</b>	R01
<b>FRAME TYPE:</b>	Spectacle with Rx insert option
<b>PROPERTIES:</b>	Neutral glass lamination, Adjustable temples
<b>PROTECTION CLASS / NORM:</b>	EN 207 full protection
<b>PROTECTION RANGE:</b>	visible, ultraviolet
<b>VLT (APPROX.):</b>	40%
<b>VISUAL BRIGHTNESS:</b>	Good
<b>COLOUR RECOGNITION:</b>	Limited

# laservision

---

## laser safety spectacle R01T1E02

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB5 + M LB5Y
>315 - 532	(OD8+)	D LB7 + IR LB8 + M LB8Y