

## laser safety spectacle R01T1E02




Articlenumber: R01T1E021001  
GTIN: 4050369002296  
Unit: 1 Stück  
Weight incl. packaging 0,44 kg  
Weight excl. packaging: 0,10 kg

### Highlights

- Protection Levels acc. to EN 207
- Application: Nd:YAG Laser at 266/355 or 532nm
- 3 different frame styles available: [R01](#), [R14](#) and [R17](#)
- restricted colour recognition and 40% VLT
- 3 different wearing options
- as cabin window available up to 210x297mm


The laservision laser safety eyewear R01.T1E02.1001 provides high protection ratings within the UV and VIS spectral range (180-532nm). The full protection spectacle can be combined with an Rx-insert. The small, reinforced goggle with adjustable temples and orange filters is characterized with a light weight and a good field of view. The shipment includes a spectacle cord and a metal box, which can also be used as its storage box.

### Color view



Transmission der Signalfarben nach DIN EN 172 //  
transmission of signal colours acc. to EN 172

### Filtercurve

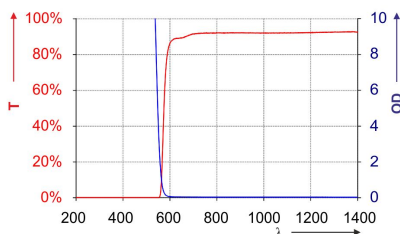

Transmissions- und OD-Kurve //  
transmission and OD curve

COATING:	no coating
CUSHION:	No cushion
FILTER:	T1E02
FILTER COLOUR:	Orange
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 5mm
FRAME:	R01
FRAME TYPE:	Spectacle with Rx insert option
PROPERTIES:	Neutral glass lamination, Adjustable temples
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	visible, ultraviolett
VLT (APPROX.):	40%
VISUAL BRIGHTNESS:	Good
COLOUR RECOGNITION:	Limited

## laser safety spectacle R01T1E02

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB5 + M LB5Y
>315 - 532	(OD8+)	D LB7 + IR LB8 + M LB8Y