


laser safety spectacle R01T1H06




Articulenumber: R01T1H061001
 GTIN: 4050369056022
 Unit: 1 Stück
 Weight incl. packaging 0,43 kg
 Weight excl. packaging: 0,08 kg

Color view

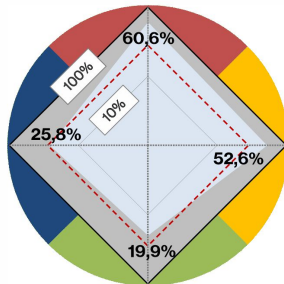

Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

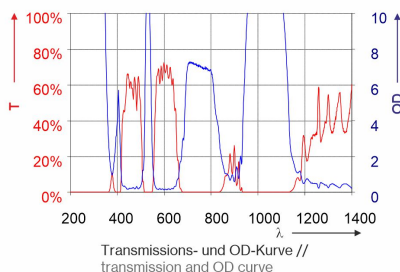

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection levels certified acc. to EN 207
- Suitable for Alexandrite-, KTP-, Diode- and Nd:YAG-lasers
- High M protection levels for powerful USP-lasers
- Available in 3 different frames: [R01](#), [R14](#) and [R17](#)
- M LB9 at 532nm and 1064nm
- Particularly good color view and VLT

The small and lightweight laser safety spectacles R01.T1H06.1001 with reflective, violet colored filters, offer high M protection levels at 532nm, 700-800nm, and 1064nm and are particularly suitable for KTP-, Alexandrite-, Diode-, Nd:YAG- and powerful USP-lasers. The full safety spectacles have a daylight transmission of approx. 25% and especially good color vision. This makes it particularly suitable for medical applications but also for the industrial range and laboratories. The R01 can be combined with an Rx insert which can be combined with your own correction filters. The small, reinforced eyewear has adjustable temples that ensure a good wearing comfort. The glasses can optionally also be worn with a headstrap from laservision (A10STRAP1LV0). The glasses are delivered safely in an aluminum box, which can later also be used as a storage box, together with a cord.

COATING:	Interference Coating (PVD)
CUSHION:	No cushion
FILTER:	T1H06
FILTER COLOUR:	Violet
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Coated glass
FILTER TECHNOLOGY:	Reflection filter
FILTER THICKNESS:	ca. 3-4mm
FRAME:	R01
FRAME TYPE:	Spectacle with Rx insert option
PROPERTIES:	Adjustable temples, M-protection rating
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Coated filter, visible
VLT (APPROX.):	25%
VISUAL BRIGHTNESS:	Good

laser safety spectacle R01T1H06

COLOUR RECOGNITION:

Particularly good

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
532 - 532	(OD10+)	DIR LB8 + M LB10
700 - 800	(OD6+)	DIRM LB6
1064 - 1064	(OD10+)	DIR LB8 + M LB10