


laser safety spectacle R01T1Q06




Articlenumber: R01T1Q061001
GTIN: 4050369050792
Unit: 1 Stück
Weight incl. packaging 0,43 kg
Weight excl. packaging: 0,09 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

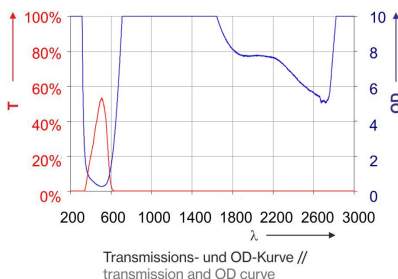

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection Levels acc. to EN 207
- M-Protection in the range of 180-315nm and 620-25,000nm
- Application: Ti_SA, OPO's, USP-lasers and super continuum laser
- 2 different frame styles: [R01](#), [R14](#)
- Different wearing options

The laser safety eyewear R01.T1Q06.1001 provides full- protection within the full range between VIS- and the IR-spectral area (620nm - 11,500nm). The laser safety spectacle can be combined with an Rx-insert. The small, reinforced goggle with adjustable temples and green filters features a light weight and a good field of view. The shipment includes a spectacle cord and a metal box, which can also be used as its storage box.

COATING:	no coating
CUSHION:	No cushion
FILTER:	T1Q06
FILTER COLOUR:	Turquoise, Green
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 11-12mm
FRAME:	R01
FRAME TYPE:	Spectacle with Rx insert option
PROPERTIES:	Neutral glass lamination, Adjustable temples
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, visible
VLT (APPROX.):	25%
VISUAL BRIGHTNESS:	Limited
COLOUR RECOGNITION:	Limited