

# laservision

## laser safety spectacle R02T2Q04




Articlenumber: R02T2Q041001  
GTIN: 4050369013797  
Unit: 1 Stück  
Weight incl. packaging 0,40 kg  
Weight excl. packaging: 0,07 kg

### Highlights

- Protection levels acc. to EN 207
- Application: Nd:YAG lasers, pump diodes, fiber- and disc laser
- 3 frames style available: [F20](#), [R02](#) and [F46](#)
- Only available as slightly curved filter (BC6)


The laser safety spectacle R02.T2Q04.1001 offers full protection within the NIR spectral range (750-1100nm). The spectacle with slightly curved (BC6), green-blue filters (without lamination) ensure for a very good field of view and a very high wearing comfort. The temples of this laser safety spectacle are multiple adjustable temples. The delivery includes a metal box which can also be used as its storage box as well as a spectacle cord.

### Color view



Transmission der Signalfarben nach DIN EN 172 //  
transmission of signal colours acc. to EN 172

### Filtercurve

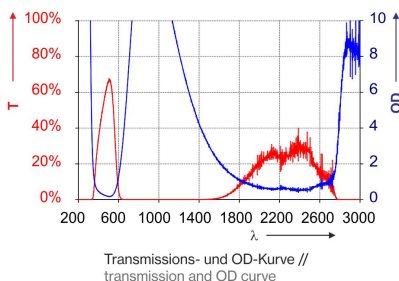

Transmissions- und OD-Kurve //  
transmission and OD curve

COATING:	no coating
CUSHION:	No cushion
FILTER:	T2Q04
FILTER COLOUR:	Green blue
FILTER CURVATURE:	Base curve 6
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 4mm
FRAME:	R02
FRAME TYPE:	Spectacle
PROPERTIES:	Adjustable temples, No neutral glass lamination
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared
VLT (APPROX.):	45%
VISUAL BRIGHTNESS:	Good
COLOUR RECOGNITION:	Good

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
750 - 1100	(OD8+)	D LB7 + IR LB8 + M LB8Y

LASERVISION GmbH & Co.KG | Würzburger Str. 152, D-90766 Fürth | T +49 911 9736 8100 | E [info@lv.com](mailto:info@lv.com) | I [uvex-laservision.de](http://uvex-laservision.de)