


laservision

laser safety goggle R14T1B09A




Articlenumber: R14T1B091004
GTIN: 4050369051720
Unit: 1 Stück
Weight incl. packaging 0,62 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

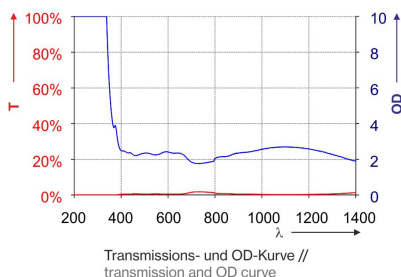

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection levels certified acc. to EN 208
- Lignment filter for the visible range
- 3 different frame styles available: [R01](#), [R14](#) oder [R17](#)
- Different wearing options

The laservision laser safety goggle R14.T1B09.1004 with a aired foam frame (A) is suitable for alignment applications within the visible laser radiation (400-670nm). It only offers alignment protection. The goggle with grey filters can be worn over large corrective glasses. The changeable click frame with a aired foam (A14AIRED1000) makes the goggles particularly comfortable to wear and prevents fogging of the laser protection filters. A clear view is guaranteed even with a long wearing period. The shipment includes a metal box which can also be used as a storage box. The removable frame can optionally be bought in sets of 5.

| | |
|---------------------------------|-----------------------------|
| COATING: | no coating |
| CUSHION: | Aired foam (A) |
| FILTER: | T1B09 |
| FILTER COLOUR: | Dark grey |
| FILTER CURVATURE: | Flat filter |
| FILTER MATERIAL: | Glass |
| FILTER TECHNOLOGY: | Absorption filter |
| FILTER THICKNESS: | ca. 4mm |
| FRAME: | R14 |
| FRAME TYPE: | Goggle with strap |
| PROPERTIES: | Neutral glass lamination |
| PROTECTION CLASS / NORM: | EN 208 Alignment protection |
| PROTECTION RANGE: | visible |
| VLT (APPROX.): | 1% |
| VISUAL BRIGHTNESS: | Low |
| COLOUR RECOGNITION: | Good |

laservision

laser safety goggle R14T1B09A

| WAVELENGTH | OD | OPERATING MODE / TESTED PROTECTION LEVEL |
|-------------|---------|--|
| 315 - <400 | (OD1+) | DIRM LB1 |
| 400 - 670 | (OD2-3) | 0,1W 2x10E-5J RB2 |
| >670 - 1300 | (OD1+) | DIRM LB1 |