


laservision

laser safety google R14T1K02F




Articlenumber: R14T1K021002
GTIN: 4050369019409
Unit: 1 Stück
Weight incl. packaging 0,64 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

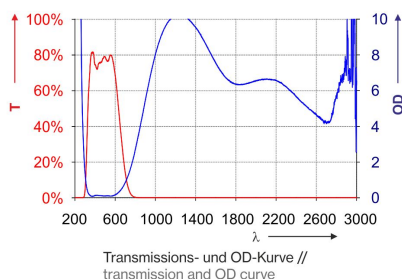

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection levels certified according EN 207
- Applications: Nd:YAG laser welding, drilling, cutting
- 3 different frame styles available: [R01](#), [R14](#) and [R17](#)
- Unlimited colour view and very high VLT
- Different wearing options
- As Cabin Window avail. up to 200x100 mm

The laservision laser safety goggle R14.T1K02.1002 with a foam frame (F), provides high protection ratings within the NIR and IR spectral area (950-3,000nm; 5,400 and 10,600nm). The OTG goggle with light grey filters can be worn over average large correction glasses. The exchangeable clip frame with foam (A14FORUB1000) lends this OTG goggles a unique and good wearing comfort. The laser safety goggle comes with a metal box, which can also be used as a storage box.

COATING:	no coating
CUSHION:	Soft foam (F)
FILTER:	T1K02
FILTER COLOUR:	Light grey
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 5mm
FRAME:	R14
FRAME TYPE:	Goggle with strap
PROPERTIES:	Neutral glass lamination
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared
VLT (APPROX.):	70%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Excellent

laservision

laser safety google R14T1K02F

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
950 - 1000	(OD5+)	DIR LB5
>1000 - 1050	(OD7+)	D LB6 + IR LB7
>1050 - 1400	(OD8+)	D LB6 + IR LB8
>1400 - 2700	(OD4+)	D LB4 + IR LB3
2700 - 3000	(OD4+)	DI LB4
5400 - 5400	(OD4+)	DI LB4
10600 - 10600	(OD4+)	DI LB4