


laservision

laser safety spectacle R14T1L01F




Articlenumber: R14T1L011002
GTIN: 4050369019454
Unit: 1 Stück
Weight incl. packaging 0,66 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

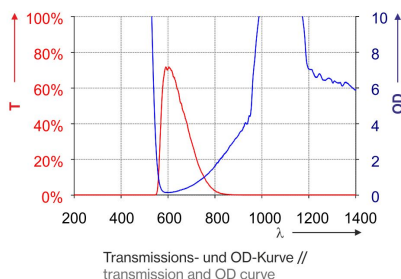

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection Levels acc. to EN 207
- M-Protection for Short Pulse Lasers (532nm; 1064nm)
- Application Nd:YAG Laser and Harmonics
- 2 different frame styles: [R01](#) and [R14](#)
- Good VLT (30%)

The laservision laser safety goggle R14.T1L01.1002 with a foam frame (F), provides very high I- and R-laser safety effects within the UV, VIS and NIR spectral area (180-532nm and 1,030-1,100nm). The OTG goggle with coated, orange filters can be worn over average large correction glasses. The exchangeable clip frame with foam (A14FORUB1000) lends this OTG goggles a unique and good wearing comfort. The laser safety goggle comes with a metal box, which can also be used as a storage box.

COATING:	Interference Coating (PVD)
CUSHION:	Soft foam (F)
FILTER:	T1L01
FILTER COLOUR:	Orange
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Coated glass
FILTER TECHNOLOGY:	Absorption filter, Reflection filter
FILTER THICKNESS:	ca. 7mm
FRAME:	R14
FRAME TYPE:	Goggle with strap
PROPERTIES:	Neutral glass lamination, M-protection rating
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Coated filter, visible, ultraviolet
VLT (APPROX.):	30%
VISUAL BRIGHTNESS:	Good
COLOUR RECOGNITION:	Slightly limited

laser safety spectacle R14T1L01F

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB5 + M LB6Y
>315 - 535	(OD9+)	DI LB7 + R LB8 + M LB9
1030 - 1100	(OD9+)	D LB7 + IRM LB9
2000 - 2200	(OD2+)	DI LB2 + R LB1
5400 - 5400	(OD4+)	D LB3 + I LB4 + R LB2
9000 - 25000	(OD4+)	D LB3 + I LB4 + R LB2