

laser safety spectacle R14T1P07F




Highlights

- Protection levels certified according EN 207
- M-protection ratings for short pulsed lasers up to 25000nm
- Applications: Nd:YAG-, disk-, fiber- and diode lasers
- As well as for SHG, FHG, THG, CO₂ and USP-lasers
- 2 different frame styles available: [R01](#) and [R14](#)
- Very broad protective effect


Articlenumber: R14T1P071002
GTIN: 4050369059290
Unit: 1 Stück
Weight incl. packaging 0,63 kg
Weight excl. packaging: 0,28 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

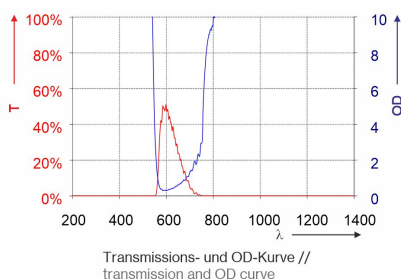

The laser safety eyewear R14.T1P07.1002 with foam frame (F) provides an extremely broadband laser protection within the UV, VIS, NIR and IR spectral range (from 180-540nm and from 730-25000nm). It is certified with M protection levels and is therefore suitable for picosecond and femtosecond lasers. It was designed for use on powerful, frequency-multiplied Nd:YAG, disk, fiber and diode lasers as well for SHG, FHG, THG, CO₂ und USP-Lasers. The goggles with orange, reflective and absorbent filters can be worn over average sized prescription glasses. The exchangeable foam frame lends this OTG goggles a unique and good wearing comfort. The laser safety goggle comes with a metal box, which can also be used as a storage box.

COATING:	Interference Coating (PVD)
CUSHION:	Soft foam (F)
FILTER:	T1P07
FILTER COLOUR:	Orange
FILTER MATERIAL:	Coated glass
FILTER TECHNOLOGY:	Absorption filter, Reflection filter
FILTER THICKNESS:	ca. 8-9mm
FRAME:	R14
FRAME TYPE:	Goggle with strap
PROPERTIES:	M-protection rating, Suitable for use with prescription glasses (OTG)
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, Coated filter, visible, ultraviolet
VLT (APPROX.):	15%
VISUAL BRIGHTNESS:	Limited

laser safety spectacle R14T1P07F

COLOUR RECOGNITION:	Limited
---------------------	---------

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB4 + M LB6Y
>315 - <532	(OD10+)	D LB7 + IR LB8 + M LB9
532 - 540	(OD10+)	D LB8 + IR LB9 + M LB10
730 - <760	(OD1+)	DIRM LB1
760 - <780	(OD2+)	DIRM LB2
780 - <808	(OD7+)	DIRM LB7
808 - 860	(OD8+)	DIRM LB8
>860 - 1025	(OD8+)	D LB7 + IRM LB8
>1025 - 1100	(OD10+)	D LB8 + IR LB9 + M LB10
>1100 - 1400	(OD10+)	D LB7 + IR LB8 + M LB9
>1400 - 3500	(OD5+)	DM LB5 + I LB5Y + R LB4
>3500 - 25000	(OD10+)	D LB5 + I LB5Y + R LB3Y + M LB6Y