


laservision

laser safety spectacle R14T2K02A




Articlenumber: R14T2K021004
GTIN: 4050369051997
Unit: 1 Stück
Weight incl. packaging 0,64 kg
Weight excl. packaging: 0,20 kg

Color view

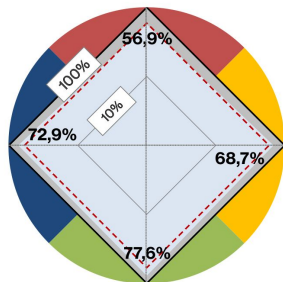

Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

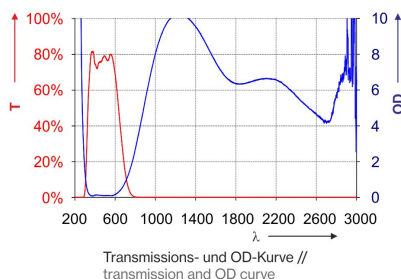

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection levels certified according EN 207
- Applications: Nd:YAG laser welding, drilling, cutting
- 7 different frame styles
available: [F20](#), [F46](#), [R01](#), [R02](#), [R10](#), [R14](#) and [R17](#)
- Unlimited colour view and very high VLT (70%)
- Different wearing options

The laservision laser safety goggle R14.T2K02.1004 with an aired foam frame (A), provides a broad band protection effect within the NIR and IR- spectral area (850-11,500nm). The OTG goggle with light grey filters without lamination can be worn over average large correction glasses. The changeable click frame with an aired foam (A14AIREDD1000) makes the goggles particularly comfortable to wear and prevents fogging of the laser protection filters. A clear view is guaranteed even with a long wearing period. The shipment includes a metal box which can also be used as a storage box. The removable frame can optionally be bought in sets of 5.

COATING:	no coating
CUSHION:	Aired foam (A)
FILTER:	T2K02
FILTER COLOUR:	Light grey
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 4-5mm
FRAME:	R14
FRAME TYPE:	Goggle with strap
PROPERTIES:	No neutral glass lamination
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared
VLT (APPROX.):	70%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Excellent

laser safety spectacle R14T2K02A

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
850 - 900	(OD3+)	DIRM LB3
>900 - 950	(OD4+)	DIRM LB4
>950 - <980	(OD5+)	DIRM LB5
980 - <1030	(OD7+)	D LB6 + IR LB7 + M LB7Y
1030 - 1400	(OD8+)	D LB6 + IR LB8 + M LB8Y
>1400 - 11500	(OD4+)	DIR LB4