


laservision

laser safety spectacle R17T1B09




Articlenumber: R17T1B091001
GTIN: 4050369022768
Unit: 1 Stück
Weight incl. packaging 0,48 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

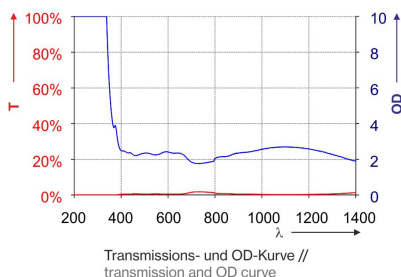

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection levels certified acc. to EN 208
- Lignment filter for the visible range
- 3 different frame styles available: [R01](#), [R14](#) oder [R17](#)
- Different wearing options

The laservision laser safety eyewear R17.T1B09.1001 is suitable for visible laser beam adjustments within a wavelength area 400-670nm and only lands for alignment purposes. The alignment spectacle can be combined with an Rx- corrective insert. The external reinforced spectacle with its adjustable temples and its dark grey filters offers a good view field. The spectacle is delivered in a metal box, which can also be used as a storage box. Within the scope of delivery is also a holding band.

| | |
|---------------------------------|--|
| COATING: | no coating |
| CUSHION: | No cushion |
| FILTER: | T1B09 |
| FILTER COLOUR: | Dark grey |
| FILTER CURVATURE: | Flat filter |
| FILTER MATERIAL: | Glass |
| FILTER TECHNOLOGY: | Absorption filter |
| FILTER THICKNESS: | ca. 4mm |
| FRAME: | R17 |
| FRAME TYPE: | Spectacle with Rx insert option |
| PROPERTIES: | Neutral glass lamination, Adjustable temples |
| PROTECTION CLASS / NORM: | EN 208 Alignment protection |
| PROTECTION RANGE: | visible |
| VLT (APPROX.): | 1% |
| VISUAL BRIGHTNESS: | Low |
| COLOUR RECOGNITION: | Good |

laservision

laser safety spectacle R17T1B09

| WAVELENGTH | OD | OPERATING MODE / TESTED PROTECTION LEVEL |
|-------------|---------|--|
| 315 - <400 | (OD1+) | DIRM LB1 |
| 400 - 670 | (OD2-3) | 0,1W 2x10E-5J RB2 |
| >670 - 1300 | (OD1+) | DIRM LB1 |