


laservision

laser safety spectacle R17T1K04




Articlenumber: R17T1K041001
GTIN: 4050369012257
Unit: 1 Stück
Weight incl. packaging 0,48 kg

Color view

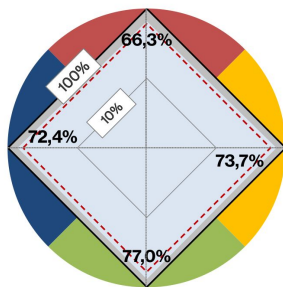

Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

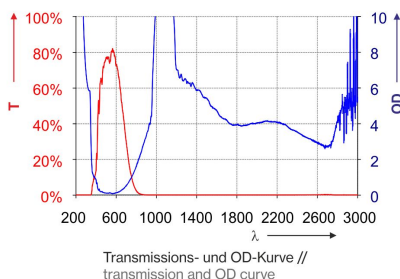

Highlights

- Very high protection levels certified acc. to EN 207
- Coated, absorbing mineral glass
- Application IR-Fiber-, -Disc-, Nd:YAG- and CO₂ lasers
- 4 different frame styles: [F20](#), [R01](#), [R02](#) and [R14](#)
- Unrestricted colour recognition and very high VLT (77%)

The laservision laser safety eyewear R17.T1K04.1001 provides very high protection effects for YAG- and fiber lasers within the NIR- and IR spectral area (1030-1100nm, 5.400nm und 9.000-11.000). The full-protection spectacle with additional coating can be combined with an RX- corrective insert. The external reinforced spectacle with light grey filters offers a good view field. The spectacle is delivered in a metal box, which can also be used as a storage box. Within the scope of delivery is also a holding band.

COATING:	Interference Coating (PVD)
CUSHION:	No cushion
FILTER:	T1K04
FILTER COLOUR:	Light grey
FILTER CURVATURE:	Flat filter
FILTER MATERIAL:	Coated glass
FILTER TECHNOLOGY:	Absorption filter, Reflection filter
FILTER THICKNESS:	ca. 4mm
FRAME:	R17
FRAME TYPE:	Spectacle with Rx insert option
PROPERTIES:	Neutral glass lamination, Adjustable temples, M-protection rating
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, Coated filter
VLT (APPROX.):	77%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Excellent

laser safety spectacle R17T1K04

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
1030 - 1100	(OD9+)	D LB8 + IRM LB9
2000 - 2200	(OD2+)	DI LB2 + R LB1
5400 - 5400	(OD4+)	D LB3 + I LB4 + R LB2
9000 - 11000	(OD4+)	D LB3 + I LB4 + R LB2