


laservision

TTS.M7P06.100x basic module

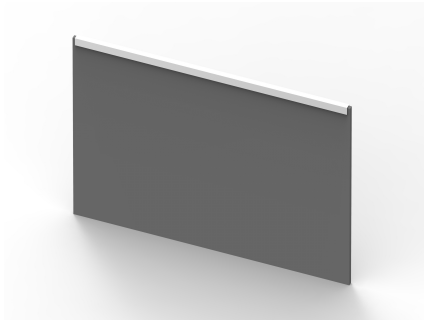

Articlenumber: TTSM7P061003
GTIN: 4050369056572
Unit: 1 Stück
Weight incl. packaging 0,00 kg

Highlights

The basic module TTS.M7P06.1003 with a standard size of (HxWxD) 306 x 375 x 6mm consists of the proven BARRIER material M7P06. (The dimensions refer to the clear width between the pillars.) The real plate is 8 mm wider so that it can be pushed into the pillars.) This is an aluminum sandwich structure with coated aluminum cover plates (color: black). It is tested and certified according to DIN EN 60825-4 & EN 12254.

COLOUR:	black
PROPERTIES:	stable standing, standard plate material M7P06, freely selectable number of modules, both-sides usable
PROTECTION CLASS / NORM:	EN 60825-4
PROTECTION RANGE:	near infrared, Infrared, visible, ultraviolet

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	–	D AB9 + IR AB4 + M AB6Y
>315 - 1050	–	D AB8 + IR AB9 + M AB10
>1050 - 1400	–	D AB7 + IR AB9 + M AB10
>1400 - 25000	–	D AB5

DIN EN 60825-4

780-1400nm | 960 kW/m² | T2 | t_{max} = 210s

9000-11000nm | 615 kW/m² | T2 | t_{max} = 105s