


TTS.M7P06.301x On-The-Table-System EXT

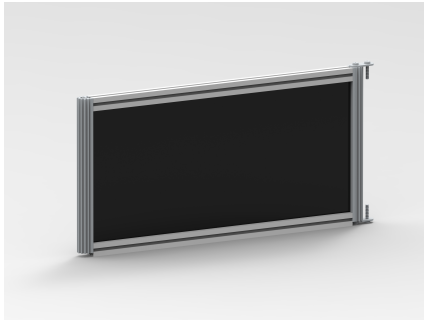

Articlenumber: TTSM7P063011

GTIN: 4050369058897

Unit: 1 Stück

Weight incl. packaging 0,00 kg

Weight excl. packaging: 0,00 kg

Highlights

With a length of 300 mm, the TTS.M7P06.3011 is the smallest intermediate module in this system. It can be connected to other modules of this system on both sides. This way it is used to extend the system in combination with the other modules. The height of the system with 306 mm matches the other systems. The laservision barrier material M7P06 is built into this module for protection. The material is certified according to DIN EN 60825-4 &

COLOUR:	black
PROPERTIES:	stable standing, standard plate material M7P06, freely selectable number of modules, both-sides usable
PROTECTION CLASS / NORM:	EN 60825-4
PROTECTION RANGE:	near infrared, Infrared, visible, ultraviolett

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	–	D AB9 + IR AB4 + M AB6Y
>315 - 1050	–	D AB8 + IR AB9 + M AB10
>1050 - 1400	–	D AB7 + IR AB9 + M AB10
>1400 - 25000	–	D AB5

DIN EN 60825-4

780-1400nm | 960 kW/m² | T2 | t_{max} = 210s

9000-11000nm | 615 kW/m² | T2 | t_{max} = 105s