laservision

laser safety window P5B04



Highlights

The plastic laser safety window P5B04 from laservision is a standard window for laser systems within the VIS (580-710nm). This dark green laser safety window offers a VLT of 25%. The laser safety material is standardized available up to a size of 3000x2000mm². Customized sizes are availble on request. The thickness is 3mm. The window is exclusively marked with OD.

Articlenumber: 000P5B041001
GTIN: 4050369019836
Unit: 1 Stück
Weight incl. packaging 0,07 kg
Weight excl. packaging: 0,05 kg

COATING:	no coating
COLOUR:	dark green
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 3mm
PROTECTION RANGE:	visible
VLT (APPROX.):	25%
VISUAL BRIGHTNESS:	Limited
COLOUR RECOGNITION:	Limited

Filtercurve

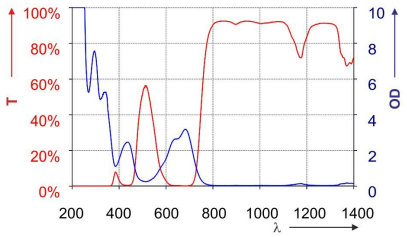

Transmissions- und OD-Kurve //
transmission and OD curve

OD

Wellenlänge (nm)	OD
580 - 600	OD1-2
>600 - <620	OD1+
620 - 633	OD2-3
>633 - 670	OD2+
670 - 690	OD3-4
>690 - 710	OD2+
>710 - 725	OD1+

LASERVISION GmbH | Würzburger Str. 152, D-90766 Fürth | **T** +49 911 9736 8100 | **E** info@lvg.com | **I** uvex-laservision.de