


# laservision

## laser safety window P5B04



Articlenumber: 000P5B041002  
GTIN: 4050369017948  
Weight incl. packaging 0,00 kg

### Filtercurve

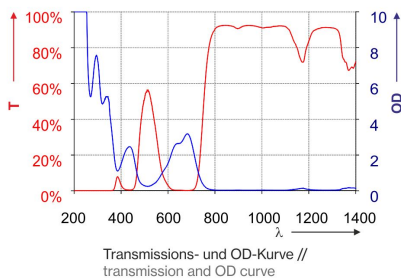

### Highlights

The plastic laser safety window 000.P5B04.1002 from laservision is a standard window for laser systems within the VIS range (580-710nm). The dimension of this dark green laser safety window is 297x210mm and offers a VLT of 25%. The laser safety material is standardized available up to a size of 600x450mm. Customized sizes are available on request. The thickness is 3mm. The window is exclusively marked with OD.

|                            |                   |
|----------------------------|-------------------|
| <b>COATING:</b>            | no coating        |
| <b>COLOUR:</b>             | dark green        |
| <b>FILTER MATERIAL:</b>    | Plastic           |
| <b>FILTER TECHNOLOGY:</b>  | Absorption filter |
| <b>FILTER THICKNESS:</b>   | ca. 3mm           |
| <b>PROTECTION RANGE:</b>   | visible           |
| <b>VLT (APPROX.):</b>      | 25%               |
| <b>VISUAL BRIGHTNESS:</b>  | Limited           |
| <b>COLOUR RECOGNITION:</b> | Limited           |

### OD

| Wavelength (nm) | OD    |
|-----------------|-------|
| 580 - 600       | OD1-2 |
| >600 - <620     | OD1+  |
| 620 - 633       | OD2-3 |
| >633 - 670      | OD2+  |
| 670 - 690       | OD3-4 |
| >690 - 710      | OD2+  |
| >710 - 725      | OD1+  |