


laservision

laser safety spectacle R14T1P05F




Articlenumber: R14T1P051002
GTIN: 4050369030121
Unit: 1 Stück
Weight incl. packaging 0,14 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

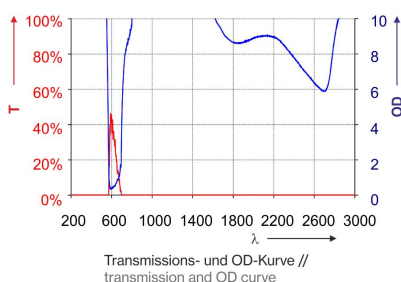

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection levels certified according EN 207
- M-protection ratings for short pulsed lasers up to 3000nm
- D LB8 + M LB9 @ 1064nm, D LB7+ M LB9 @ 532nm
- 2 different frame styles available: [R01](#) and [R14](#)
- Applications: powerful, frequency multiplied Nd:YAG, disc-, fiber and diode lasers

The laser safety eyewear R14.T1P05.1002 with foam frame (F) provides an extremely broadband laser protection within the UV, VIS, NIR and IR spectral range (180-532nm und 805-11.500nm). The OTG goggle with brown filters can be worn over average large correction glasses. The exchangeable clip frame with lip seal lends this OTG goggles a unique and good wearing comfort. The laser safety goggle comes with a metal box, which can also be used as a storage box.

COATING:	Interference Coating (PVD)
CUSHION:	Soft foam (F)
FILTER:	T1P05
FILTER COLOUR:	Orange
FILTER MATERIAL:	Coated glass
FILTER TECHNOLOGY:	Absorption filter, Reflection filter
FILTER THICKNESS:	ca. 10mm
FRAME:	R14
FRAME TYPE:	Goggle with strap
PROPERTIES:	M-protection rating, Suitable for use with prescription glasses (OTG)
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared, Coated filter, visible, ultraviolet
VLT (APPROX.):	15%
VISUAL BRIGHTNESS:	Limited
COLOUR RECOGNITION:	Limited

laser safety spectacle R14T1P05F

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB5 + M LB6Y
>315 - 532	(OD9+)	D LB7 + IR LB8 + M LB9
532 - 535	(OD10+)	D LB8 + IR LB9 + M LB10
730 - <780	(OD1+)	DIRM LB1
780 - <808	(OD7+)	DIRM LB7
808 - 860	(OD8+)	DIRM LB8
>860 - <885	(OD5+)	DIRM LB5
885 - <900	(OD6+)	DIRM LB6
900 - <1025	(OD7+)	DIRM LB7
1025 - 1400	(OD10+)	D LB8 + IR LB9 + M LB10
>1400 - 3500	(OD6+)	DM LB5 + I LB5Y + R LB4
>3500 - 25000	(OD6+)	D LB5 + I LB5Y + R LB3Y + M LB6Y