


laservision

laser safety spectacle R14T1M01L




Article number: R14T1M011003
GTIN: 4050369019652
Unit: piece
Weight incl. packaging: 0,70 kg
Weight excl. packaging: 0,27 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filter curve

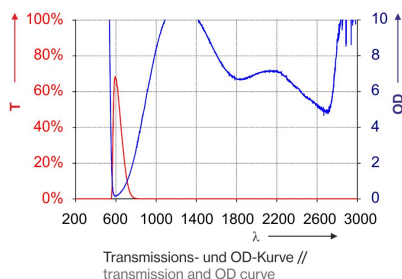

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Protection Levels acc. to EN 207
- M-Protection for Short Pulse Lasers
- Available in the frames style: [R14](#) and [R01](#)
- Good VLT
- different cushion frame options

The laservision laser safety goggle R14.T1M01.1003 with a lip seal frame (L), provides broad laser protection ratings within the UV, VIS, NIR and IR spectral area (180-532nm and 808-11,500nm). The OTG goggle with orange filters can be worn over average large correction glasses. The exchangeable clip frame with lip seal (A14LIPSE1000) lends this OTG goggles a unique and good wearing comfort. The laser safety goggle comes with a metal box, which can also be used as a storage box.

COATING:	no coating
FILTER CURVATURE:	Flat filter
PROTECTION CLASS / NORM:	EN 207 full protection
CUSHION:	Lip seal (L)
FRAME TYPE:	Goggle with strap
PROPERTIES:	Neutral glass lamination
FRAME:	R14
FILTER:	T1M01
FILTER COLOUR:	Orange
COLOUR RECOGNITION:	Slightly limited
FILTER THICKNESS:	ca. 11mm
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
PROTECTION RANGE:	Infrared near infrared ultraviolett visible
VISUAL BRIGHTNESS:	Good
VLT (APPROX.):	25%

laser safety spectacle R14T1M01L

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB5
>315 - 532	(OD8+)	D LB7 + IR LB8 + M LB8Y
808 - <890	(OD3+)	DIRM LB3
890 - <940	(OD5+)	DIRM LB5
940 - <1000	(OD6+)	DIRM LB6
1000 - <1025	(OD7+)	DIR LB7 + M LB7Y
1025 - 1100	(OD9+)	D LB7 + I LB9 + R LB8 + M LB8Y
>1100 - 1400	(OD8+)	D LB7 + IR LB8 + M LB8Y
>1400 - 3000	(OD4+)	DI LB4
>3000 - 11500	(OD5+)	D LB5 + I LB5Y